


U-ECKE mit GUMMIBÄNDER

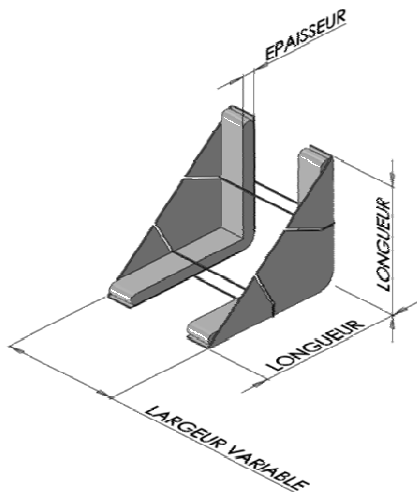

Corrupad variable width corner can fit different angle sizes while keeping its resistance to crushing and cushioning properties.

Composition: single face corrugated + silicate glue + thermo fusible glue

DIMENSIONAL CHARACTERISTICS

Variable width corner	Minimum size (mm)	Maximum size (mm)
Length 2	220	220
Groove	12	18
Thickness	35	200

*Other dimensions are possible on request

APPLICATIONS

